

SINCE 1978




Product Datasheet

LEADING LIGHT

vkleadinglight.gr

Aria

VK/04689/PE/D/CG/W/40

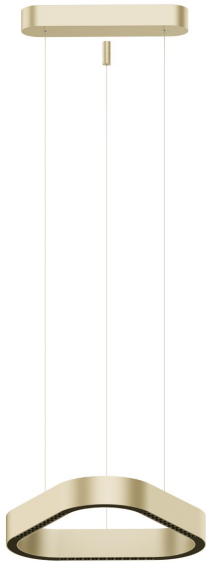


Champagne Gold. 3000K. 40W. 3147lm. AC220-240V. Up80° Down45°.
Led Bridgelux SMD. Driver Anway. Ceiling/pendant. -20°C → 45°C.
50.000hrs. Clicks 20.000. Dimmable Yes, Triac. CRI>90.
Aluminum+silicone. IP20


IP20



Dimensions

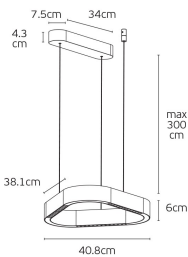

Gallery





Downloads




VK Leading Light

Since 1978

Technical Specifications	
Kelvin	3000K
Power	40W
Voltage	AC220-240V
Fitting	Pendant
Type	Light
Safety class	
Light source	Bridgelux
IP Rating	IP20
CRI	CRI>90
Dimmable	 TRIAC
Lifetime	50.000hrs
Clicks	20,000
Driver	Anway
Cable Length	300cm (max)
Working temperature	-20°C-45°C
PAGE	66 New Products 2026
NICKNAME	Aria

Physical Specifications	
Family	Aria
Color	Champagne gold
Material	Aluminum+Silicone
Width	38.1cm
Length	40.8cm
Height	6cm (+300cm of cable)
Net weight of product (kg)	3.10kg
Gross weight with inner box (kg)	4.90kg
Width (inner box)	45cm
Length (inner box)	48.8cm
Height (inner box)	13.3cm

Illumination Data	
Lumen	3147lm
Beam angle	Up80° Down45°
Lighting direction	

Packing Info	
Pcs/carton	1pc

Certification & Warranty	
Guarantee	2 years