

SINCE 1978




LEADING LIGHT

Product Datasheet

vkleadinglight.gr

Arbor

VK/04699/PE/D/CG/W

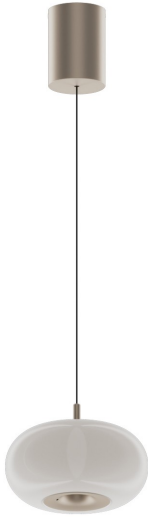


White/Champagne Gold. 3000K. 12W. 1307lm. AC220-240V. 36°. LED Bridgelux+Sanan. Driver KGP. Location Ceiling. Working temperature -20°C → 45°C. Lifetime 50.000hrs. Clicks 20.000. Dimmable Yes, triac dimmable. CRI>90. Glass+Aluminum. IP20

IP20



Dimensions



Gallery





Downloads




VK Leading Light

Since 1978

Technical Specifications	
Kelvin	3000K
Power	12W
Voltage	AC220-240V
Fitting	Pendant
Type	Light
Safety class	
Light source	Bridgelux-Sanan
IP Rating	IP20
CRI	CRI>90
Dimmable	 TRIAC
Lifetime	50.000hrs
Clicks	20,000
Driver	KGP
Cable Length	300cm (max)
Working temperature	-20°C-45°C
PAGE	110 New Products 2026
NICKNAME	Arbor

Physical Specifications	
Family	Arbor
Color	White/Champagne Gold
Material	Glass + Aluminum
Width	ø20cm
Length	ø20cm
Height	14.3cm + 11cm (+300cm of cable)
Net weight of product (kg)	1.4kg
Gross weight with inner box (kg)	2.1kg
Width (inner box)	26.8cm
Length (inner box)	28.3cm
Height (inner box)	26.3cm

Illumination Data	
Lumen	1307lm
Beam angle	36°
Lighting direction	

Packing Info	
Pcs/carton	8pcs

Certification & Warranty	
Guarantee	2 years