


BRICK 412B-L01F1B-01 Wall Bracket BRICK LED SMD 2x5W 325lm CRI80 3000K 67°,67° up-down White

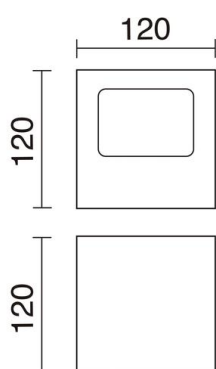

BRICK family is UAN LED wall sconces that stand out for its square cube-shaped design. BRICK LED fixtures are manufactured from aluminum in view of the decoration of residential interiors. LED luminaire is available in two version one single issue and another double light emission (direct and indirect). Moreover, the LED applied BRICK designed in two colors: black and brushed aluminum. BRICK is the reduced version of the family of wall LED BRICK G.

GENERAL DATA

Category	Surface
Family	Brick
Finish	[01] White
Location	Indoor
Installation	Wall
Body material	Aluminum
Diffuser material	Transparent glass
ETIM class	EC0028g2
EAN	8435256550207

LIGHT SOURCES AND BEAMS

Sources	LED SMD 2x 5W max. 2x 325lm 3000K CRI80
Total flux	585 lm
Energy efficiency	G
Beams	67° - Direct symmetric 67° - Indirect symmetric

TECHNICAL DATA

Dimensions	Height x Width x Length (mm): 120 x 120 x 120
IP	IP44
Protection class	Class I
Frequency	50/60 Hz
Input voltage	220-240V AC V
Auxiliary gear	Electronic
Lifetime	40,000 h
LED lifetime L	80
LED lifetime B	50
Weight	2.03 Kg
ECORAE category I	LED-B

BRICK

412B-L01F1B-01 Wall Bracket BRICK LED SMD 2x5W 325lm CRI80 3000K 67°,67° up-down
White

PRODUCTS OF THE SAME FAMILY



Brick Down



Brick Up Down