

SINCE 1978



LEADING LIGHT

Installation

Please see the instructions carefully before commencing assembly

VK/02055

EN



220-240V. LED. Class I. IP54.

Please read these instructions carefully prior to installation and retain them for future reference.

If in doubt, we recommend you consult a qualified electrician. Our products should not be modified. If any modification is made, it will invalidate the warranty and may render the product unsafe.


IMPORTANT!

Before commencing installation or maintenance, the electricity supply must be isolated. We recommend that the circuit fuse is withdrawn to prevent accidental switching on whilst work is in progress.

Warning: This product contains fragile parts. Care must be taken when fitting or handling these parts to prevent personal injury or damage to the fitting.

MOUNTING INSTRUCTIONS

1. Choose the desired location for the fitting, drill with a suitable drill bit and plug the mounting holes with suitable plugs. Take care not to foul any mains cables or pipes below the surface while drilling.
2. Use a sharp object such as a screwdriver to pierce the rubber grommet in the back plate.
3. Feed the incoming mains cable to the base of the fitting, connect the mains cable to the terminals according to the diagram.

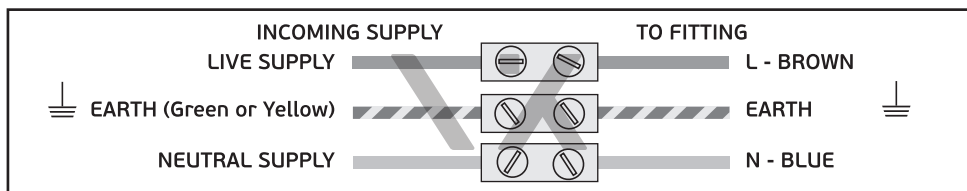

4. The terminal block can be removed from its mount for ease of connection. Tighten all terminal screws ensuring that no loose strands of cable are showing. **NOTE: This is a Class I fitting and must be earthed.**
5. After connection is finished, fix the terminal block again to the base. Then mount the fitting to the place with supplied screws.
6. Installation is now complete, switch on at the mains to test.

SAFETY INSTRUCTIONS

1. Before putting the luminaire into operation, check that the supply voltage corresponds with the specified ratings.
2. Chipped or broken glass covers should be replaced immediately. The luminaire should not be used without its protective glass cover.
3. Please do not look directly into the lamp when it is switched on.
4. Do not use abrasive materials and cleaners on these products as this may damage the finish. Do not clean the units with a pressure washer.
5. This product contains non replaceable parts. If damage occurs the part should be scrapped.

TECHNICAL DATA

Nominal voltage: 220-240V~50Hz
Bulb: LED bulb (incl.)

Safety class: Class I
Type of protection: IP54

VK Leading Light / Vaios I. Karakostas S.A. Imports - Exports Trade

A: 8 Aristotelous St, Tavros, 177 78 Athens, Greece T: +30 210 99 69 610-11, +30 210 34 58 072, +30 210 34 58 075 F: +30 210 99 58 374 E: info@vkleadinglight.gr W: vkleadinglight.gr